

FARO® Laser Tracker ION



Agile ADM

Acquire targets even if they are moving; no need to switch between ADM and IFM systems

SelfComp

Automatically tunes Laser Tracker parameters to ensure high accuracy

Versatile Mounting Options

Mounts vertically, horizontally or upside down*, providing versatility in tight or congested areas *Inverted mounting requires the use of the integrated thread ring.

Instant-On Laser

No warm-up of the laser tube is required

Smart Warm-Up

Accelerates the stabilization time in order to minimize the initial temperature changes' impact on measurements

Integrated Weather Station

Monitors and compensates for changes in temperature, air pressure and humidity

Integrated Precision Level

Establishes level to gravity within the measurement job

World's Most Accurate Large Volume Laser Tracker

The FARO Laser Tracker ION is an extremely accurate, portable coordinate measuring machine that enables you to build products, optimize processes, and deliver solutions by measuring more quickly, simply and precisely than previously possible. The ION is the most accurate laser tracker available based on the most common types of measurement applications where the angular error of the instrument is predominant. It also features a longer measurement range, lighter weight, and contains the fastest, most sophisticated distance measuring system: Agile Absolute Distance Meter (aADM).

Common Applications

Alignment: Real-time feedback of object positioning • **Installation:** Lay out / level machine foundation • **Part inspection:** Digital record of actual vs nominal data • **Tool building:** Set up and inspect tools with only one person • **Reverse Engineering:** Acquire high accuracy digital scan data

Features

- ▶ 0.049mm (0.002") volumetric accuracy at 10m (33 feet)
- ▶ 110m* (361 feet*) diameter range
- ▶ Agile ADM instant beam acquisition
- ▶ As light as 17.7kg
- ▶ High performance, real-time dynamic measurements

*with selected targets

System Specifications

Dimensions

Head size: 280mm (W) x 554mm (H)
Head weight: 17.7kg (19.5kg w/IFM option)
Controller size: 282mm (L) x 180mm (D) x 280mm (H)
Controller weight: 5.2kg

Range

Horizontal envelope: ± 270°
Vertical envelope: +75° to -50°
Minimum working range: 0 meters
Maximum working range: 55m with select targets
 40m with standard 1.5" & 7/8" SMRs
 30m with standard 1/2" SMR

Environmental

Altitude: -700 to 2,450 meters
Humidity: 0 to 95% non-condensing
Operating Temperature: -15°C to 50°C

Laser Emission*


633-635 nm Laser, 1 milliwatt max/cw.
 Class II Laser Product

Distance Measurement Performance**

Agile ADM	Optional Interferometer
Resolution: 0.5µm	Resolution: 0.5µm
Sample rate: 10,000/sec	Sample rate: 10,000/sec
Accuracy: 8µm + 0.4µm/m	Accuracy: 8µm + 0.4µm/m
R0 Parameter: 8µm	R0 Parameter: 8µm


Angle Measurement Performance**

Angular accuracy: 10µm + 2.5µm/m
Maximum angular velocity: 180°/sec
Optional Precision Level Accuracy: ± 2 arcseconds

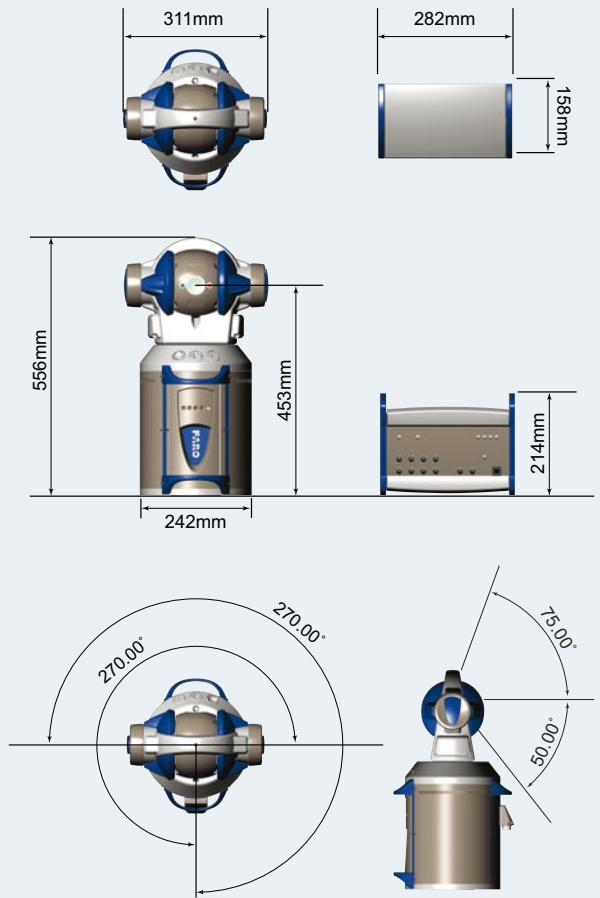


System Specifications

Horizontal Scale Bar Measurement (2.3 m)		
Range (m)	ADM (mm)	IFM (mm)
2	0.022	0.021
5	0.032	0.032
10	0.049	0.049
20	0.085	0.085
30	0.120	0.120
40	0.156	0.156
50*	0.191	0.191
55*	0.209	0.209




In-Line Distance Measurement			
Length (m)	Distance (m)	ADM (mm)	IFM (mm)
2 - 5	3	0.009	0.003
2 - 10	8	0.011	0.005
2 - 20	18	0.015	0.009
2 - 30	28	0.019	0.013
2 - 40	38	0.023	0.017
2 - 50*	48	0.027	0.021
2 - 55*	53	0.029	0.023

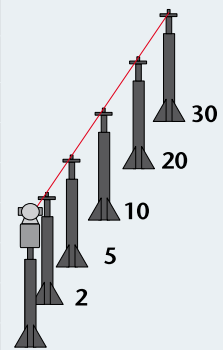

* Product complies with radiation performance standards under the food, drug, and cosmetics act and interant standard IEC 60825-1 2001-08.
 ** Typical Accuracy shown is half the Maximum Permissible Error (MPE) and variation in air temperature is not included. MPE and all accuracy specifications are calculated per ASME B89.4.19 - 2006 Standard. Specifications, descriptions, and technical data may be subject to change. Protected by U.S. patents: 7327446, 7352446, 7466401

FARO, The Measure of Success, FaroArm, CAM2, XtremeADM and FARO Laser ScanArm are registered trademarks of FARO Technologies Inc.



Global Offices: Australia • Brazil • China • France • Germany • India • Italy • Japan • Malaysia • Mexico • Netherlands • Philippines • Poland
 Portugal • Singapore • Spain • Switzerland • Thailand • Turkey • United Kingdom • USA • Vietnam

www.faro.com ■ Freecall 00 800 3276 7253 ■ info@faro.com