

NEXUS 3200 SERIES



NEXUS 3200 Series Brinell hardness testers



6.5", Full color industrial LCD touch screen for easy tester operation, can also be operated by wireless mouse and keyboard.

High performance micro PC, Windows Embedded operating system, SSD drive.

IMPRESSIONS™ advanced hardness testing software, includes file storage, test program storage, machine settings storage, etc.

Front side USB connector for USB stick or data drive

Indent image via Brinell Indent Optical Scanner (BIOS) with built-in ringlight. Advanced algorithms for automatic indent measurement. Indent ZOOM function

Optional spring loaded workpiece clamping system

Precision elevator screw (Motorized, optional)

Connectivity: USB (4), UTP-RJ45-LAN, W-LAN, RS232, Motorized X-Y stage (optional)

Brinell Indent Optical Scanner (BIOS) can be used on large or small components. One push on the button generates a crisp high definition image of the Brinell indentation on the LCD screen. Automatic measurement or manual measurement according to pre-setting.

Features

Top quality compact Brinell hardness tester with video measuring system.

Load cell, closed loop, force application system.

Test forces starting from 62.5kgf/612N up to 3000kgf/29kN.

Embedded high performance micro PC, Windows Embedded operating system, SSD drive for enhanced reliability.

6.5" Full color industrial LCD touch screen (can also be operated by mouse and keyboard).

IMPRESSIONS™ advanced user interface with "key in" option for indent dimensions and automatic Brinell hardness calculation.

Brinell Indent Optical Scanner (BIOS) showing crisp images on the LCD screen, fully automatic measurement.

- Simultaneous conversion to Rockwell, Vickers, Brinell and Leeb rebound testing
- Indent ZOOM function
- Fully automatic indent measurement
- BIOS equipped with LED ring light for dark field illumination
- Connectivity USB (4), UTP-RJ45-LAN, W-LAN, RS232
- Motorized X-Y stage (optional)
- XL version, 390mm workpiece height, 220mm throat depth

Applications

- Hardness of castings and forgings
- For flat and cylindrical work pieces
- Wide application within the automotive and aerospace industry
- Foundries or workshop testing
- Sample testing or quality control testing



IMPRESSIONS™, Firmware

IMPRESSIONS™ is the advanced user operating system of the NEXUS 3200.

The software incorporates, manual and automatic measurement for all scales, image editing, file storing, image storing, report printing and many other advanced functions.

The firmware converts to 2 different hardness (and tensile) scales simultaneously.

The conversions can be set to particular materials and according to certain standards (ISO/ASTM).

All data can be copied or exported in to MS applications like Word, Excel, or a report generator that emails test results directly to your workstation, or server. All data can be accessed over the LAN or WLAN connections, the system also generates common CSV files.



Technical specifications

NEXUS 3200 Series	
Hardness scales	Brinell (HB)
Load range	62.5kgf/612N to 3000kgf/29kN
Test loads	62.5kgf/612N, 80kgf/784N, 100kgf/980.7N, 120kgf/1176N, 125kgf/1225N, 187.5kgf/1838N, 250kgf/2.45kN, 500kgf/4.9kN, 750kgf/7.35kN, 1000kgf/9806N, 1500kgf/14.7kN, 3000kgf/29kN
Brinell test range	HB: 62.5kgf/612N, 100kgf/980.7N, 125kgf/1225N, 187.5kgf/1838N, 250kgf/2.45kN, 500kgf/4.9kN, 750kgf/7.35kN, 1000kgf/9806N, 1500kgf/14.7kN, 3000kgf/29kN
Indentors	Balls 2.5mm - 5mm - 10mm
Video system	Brinell Indent Optical Scanner (BIOS-1, standard, field of view Hor. 8mm; Ver.6,5mm) Brinell Indent Optical Scanner (BIOS-2, optional, field of view Hor. 2.4mm; Ver.1.8mm)
Electronic system	High performance embedded micro system controller, MS Windows®, 6.5" full color touch screen, automatic and manual measurement
Test force selection	Electronic, closed loop, load cell, force feedback system. Test force selectable over menu operation
Test procedure	Automatic, loading/dwell/unloading
Loading speed	Variable, depending on test load, scale
Test force accuracy	Tolerance within 0.5% full range
Firmware	IMPRESSIONS™, advanced hardness testing software including options for: manual measurement, automatic measurement, indent zoom function, scale conversion, file storage, report printing, test program storage, machine settings storage, graphic interface for indenter position
Hardness conversion	Rockwell, Vickers, Brinell, Leeb and Tensile 2 scales simultaneously
Standards	Meets or exceeds, ISO, ASTM, JIS/GB (Nadcap) standards
Statistics	Total tests, max, min, average, range, standard deviation, all in real time after each test
Connectivity	USB (4), UTP-RJ45-LAN, W-LAN, RS232
Loading mechanism	Fully automatic, closed loop, force feedback, loading, dwell, unloading
Dwell time setting	Default 10 seconds, user defined 1 to 99 seconds
Workpiece accommodation	Vertical capacity 190mm normal model, 390mm XL model, Horizontal capacity 220mm (from center-line), 220mm XL model (from center-line)
Operating temperature	10°C to 35°C, non-condensing
Humidity	10% to 90% non-condensing
Machine dimensions	190mm x 617mm x 790mm, 190mm x 617mm x 985mm (XL/XLMmodel)
Machine weight	130kg, 145kg XL model 150kg XLM model
Power supply	100V AC to 240V AC, 50Hz/60Hz, single phase

Standard delivery

- V-anvil, hardened, ø80mm
- Large flat anvil, ø200mm
- Ball indentors ø 2.5mm, ø5mm and ø10mm
- Hardness test block, 150-250 HBW 10/3000
- Hardness test block, 75-125 HBW 10/1000
- Hardness test block, 150-250 HBW 2.5/187.5
- Brinell Indent Optical Scanner (BIOS-1, field of view Hor. 8mm - Ver. 6.5mm), including large support base, small support base and magnetic support base
- Wireless mouse and keyboard
- Fuse 2A (3 pcs)
- Power cable
- Four adjustable vibration dampers
- INNOVATEST® certificate
- Installation and user manual

Optional accessories

- Certified indentors (ASTM, DIN, ISO)
- Certified reference hardness blocks (ASTM, DIN, ISO)
- Large testing table, 350mm x 250mm, with T-slots
- Extra large testing table, 450mm x 350mm, with T-slots
- Custom testing tables
- Motorized X-Y stage
- Spring loaded workpiece clamping system
- Extended height/width frame XL models
- Motorized spindle for fully automatic testing on XL models
- Solid tester stand and storage cabinet




Order details

NEXUS 3200	Brinell, with BIOS, test forces 62.5kgf/612N to 3000kgf/29kN
NEXUS 3200XL	Brinell, with BIOS, tall version, test forces 62.5kgf/612N to 3000kgf/29kN
NEXUS 3200XLM	Brinell, with BIOS, tall version with motorized spindle, test forces 62.5kgf/612N to 3000kgf/29kN


Technical drawing NEXUS 3200

All dimensions are in mm

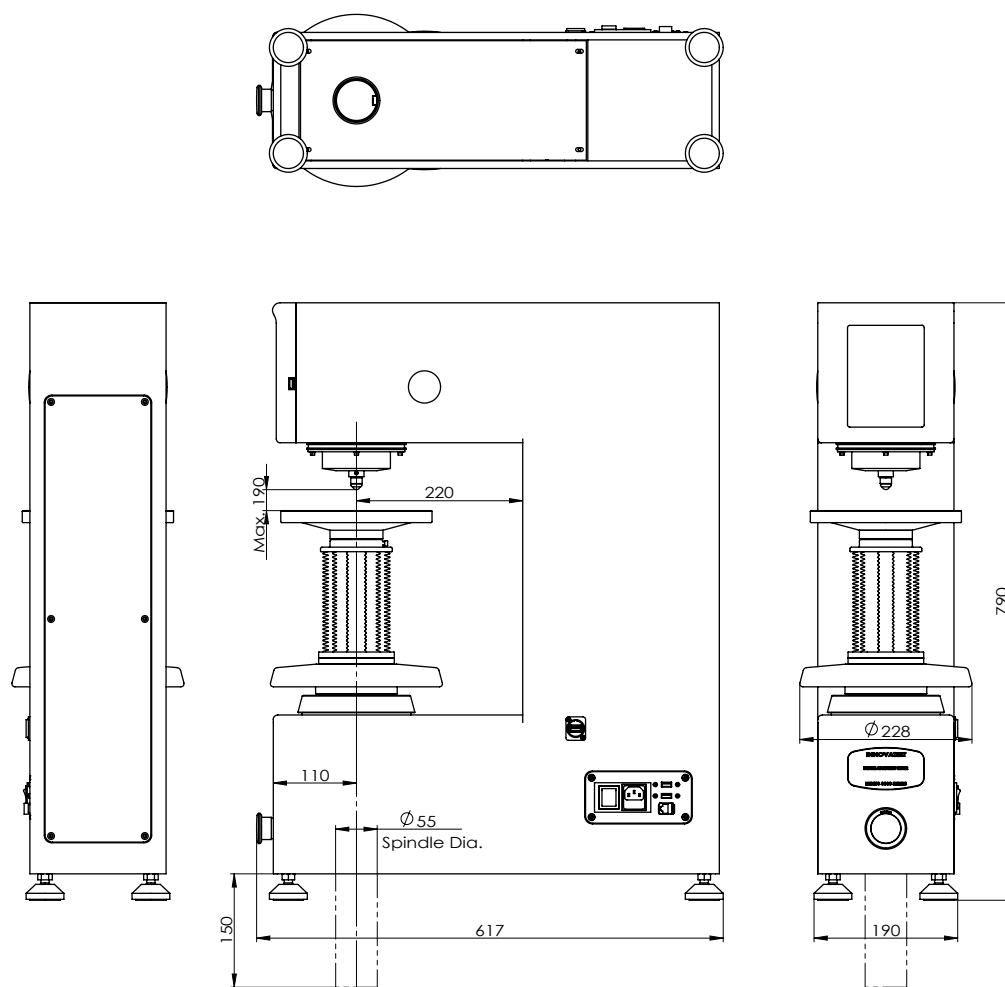

Technical drawing NEXUS 3200XL(M)

All dimensions are in mm

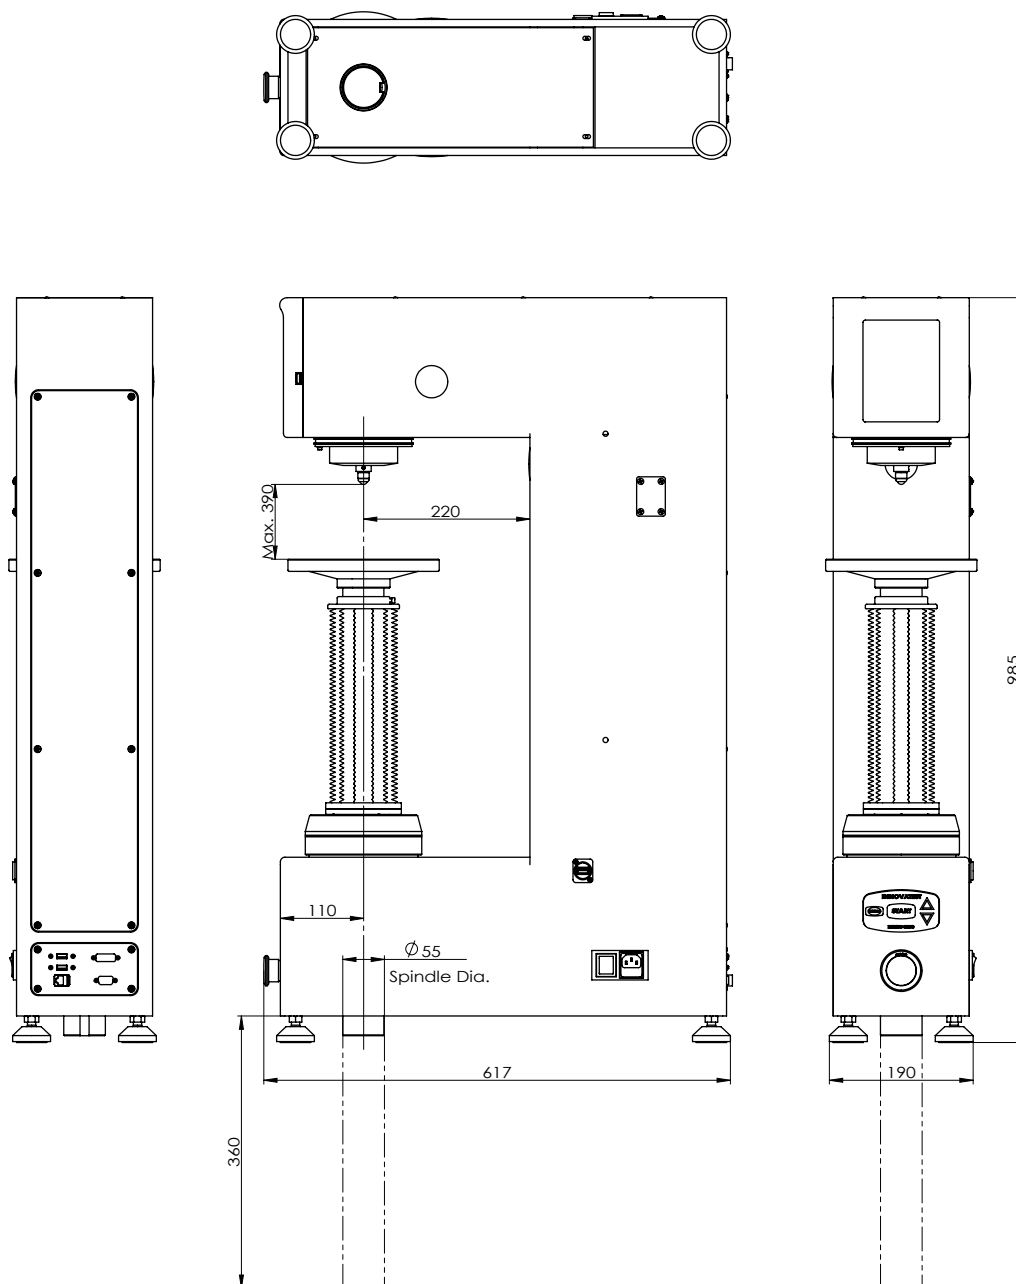

Kapcsolat, bővebb információ:



Sidex Trade Kft.

1224 Budapest, Dózsa György út 105.
TT Ipartelep (volt Mechanikai Művek)
Tel : (+36-1) 424-1705, Mobil: (+36-30) 9349-611
Fax : (+36-1) 424-1704
Web: <http://www.sidex.hu> – E-mail: info@sidex.hu

CORPORATE HEAD OFFICE

INNOVATEST Europe BV
MANUFACTURING, DISTRIBUTION & SERVICE

Borgharenweg 140
6222 AA Maastricht (The Netherlands)
Phone: +31 43 3520060
Fax: +31 43 3631168
E-mail: info@innovatest-europe.com
Website: www.innovatest-europe.com

INNOVATEST Shanghai Co., Ltd.
DISTRIBUTION, SALES & SERVICE

Building 2, No.123, 1165 Nong Jindu Road,
South Metropolis Industrial Park
Minhang District, Shanghai, P.R. China
Zip code: 201108
Phone: +86 21 60906200
Fax: +86 21 60912595
E-mail: info@innovatest-shanghai.com
Website: www.innovatest-shanghai.com

INNOVATEST SOUTH EAST ASIA
CUSTOMER SUPPORT CENTER

(c/o LMS Technologies Pte Ltd)
20 Sin Ming Lane #05-58 Midview City
Singapore 573 968
Phone: +65 6451 1123
Fax: +65 6452 1011
E-mail: info@lmstech.com.sg
Website: www.lmsscscientific.com